

VENTILATION UNITS

A5440031.05
A5440032.05
A5440033.05
A5440034.05
A5440035.05
A5440021.05
A5440022.05
A5440023.05
A5440024.05
A5440025.05
A5440084.05
A5440085.05
A5440094.05
A5440095.05

Contents

Applications	<i>•</i>
Features	·
Dimensions	





Applications


Features

Extending the chimney if the ventilation module has to be placed lower.

- The extension duct has a plug and socket connection as standard. The extension duct is available in two lengths: $1.0 \, \text{m} \, / \, 3.3 \, \text{ft}$ and $0.5 \, \text{m} \, / \, 1.6 \, \text{ft}$.
- The chimneys can be joined using push pull rivets for quick mounting to the chimney.
- The CLICK extension duct is a flat sheet with a click connection system which can be easily assembled on location.
- The demountable sleeve used to connect CLICK ducts together is supplied separately, and is secured to the duct by 6 press-in plugs.
- Colour: grey



Dimensions

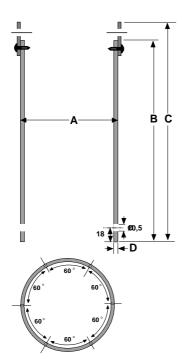

Туре	φА	В	С	D
	Outside diameter chimney to be connected [mm]	Built in height	Total height [mm]	Thickness chimney [mm]
35	362	1000	1038	4
	302	500	538	4
40	412	1000	1038	4
	412	500	538	4
45	462	1000	1038	4
	402	500	538	4
50	512	1000	1038	5
		500	538	3
56	572	1000	1038	5
	312	500	538	3
50 CLICK	512	1000	1038	4 *
	012	500	538	7
56 CLICK	572	1000	1038	4 *
oc oblore	072	500	538	•

^{*} If fans are installed under a CLICK extension duct, they should be fixed with 3 self-tapping screws, for a safe construc-